(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷: H04L 9/32, H04K 1/00

(21) International Application Number: PCT/IB01/02822

(22) International Filing Date:
21 December 2001 (21.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20002858   27 December 2000 (27.12.2000)   FI
20010080   12 January 2001 (12.01.2001)   FI

(71) Applicant (for all designated States except US): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 ESPOO (FI).

(72) Inventor; and
(75) Inventor/Applicant (for US only): HAVERINEN, Henry [FI/FI]; Arkkitehdinkatu 15 A 3, FIN-33720 Tampere (FI).

(74) Agents: JOHNSON, Ian et al.; Nokia IPR Department, Nokia House, Summit Avenue, Farnborough, Hampshire GU14 ONG (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
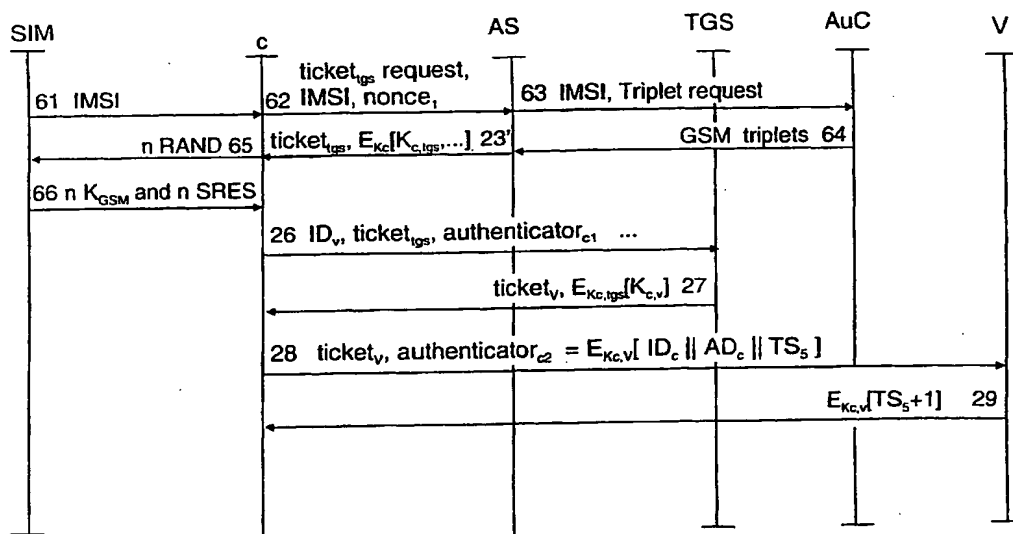
(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(54) Title: AUTHENTICATION IN DATA COMMUNICATION

(57) Abstract: Method of authenticating a client comprising the steps of sending a subscriber identity to an authentication server; obtaining at least one challenge and at least one first secret to the authentication server based on a client's secret specific to the client; forming first credentials; forming a first authentication key using the at least one first secret; encrypting the first credentials using the first authentication key; sending the at least one challenge and the encrypted first credentials to the client; forming an own version of the first authentication key at the client; decrypting the encrypted first credentials using the own version of the first authentication key. In the method, the encrypted credentials are sent together with the at least one challenge to the client so that the client can proceed authentication only if it can derive the first secret from the at least one challenge.

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1

AUTHENTICATION IN DATA COMMUNICATION

This invention relates to authentication in data communication. In particular the invention relates to, but is not limited to, authenticating mobile stations and
5   network servers communicating with each other through a network such as the Internet.

The Internet is used to share public information. Since it is an open system, it should not be used to share confidential information unless precautions are taken
10   to protect the information by use of passwords, encryption and the like. Even so, if passwords are used, they can be determined by hackers. In the Internet, there are clients (typically personal computers with computer programs) and servers (server computers running computer programs that cause them to provide services to the clients). Typically computer programs used at clients and servers assume that
15   their users are honest about their identity. Some client/server applications rely on the client to restrict its activities to those which it is allowed to do, with no other enforcement by the server. Strong authentication is highly desirable for transactions involving money, confidential data or both.

20   One way to improve the situation is to use dedicated authentication protocols and, if necessary, encryption protocols for verifying the authenticity of a party and for preventing unauthorised parties from obtaining access. In addition, these protocols can typically be used to verify the integrity of any information exchanged over a link so that a recipient can be certain that the data received have not been
25   tampered with.

Kerberos is a protocol designed to provide strong authentication for client/server applications by using secret-key cryptography. At least two versions of Kerberos have been described, versions 4 and 5. The version 5 Kerberos has been
30   described by J. Kohl and C. Neuman in "The Kerberos Network Authentication Service (Version 5)", RFC 1510, September 1993. Versions 4 and 5 have also been described by W. Stallings, "Cryptography and Network Security, Principles

2

and Practice", 2nd edition, p. 323-340. These two versions of Kerberos are briefly described in the following passages.

Fig. 1 shows an overview of a Kerberos system KS according to Kerberos version
5   4. The Kerberos system KS comprises a client c which can obtain access to the Internet, a Kerberos server KSS in the Internet and a service server V for providing a service for which authentication is required. The Kerberos server KSS comprises an authentication server AS, a ticket-granting server TGS, and a database DB comprising (hashed) passwords of different clients. The client c contains a
10   personal computer (PC), comprising an Input/Output module IO_c (such as a modem or a network adapter) for connecting to the Internet, a central processing unit CPU_c for processing data and a memory MEM_c. The memory has a non-volatile portion for storing applications for controlling the CPU_c and a random access memory portion for use in processing data. Additionally, the client c has a
15   user interface UI for interacting with a user. The UI may prompt a user to give a password and may receive the password. In a Kerberos system, the applications together with the personal computer form the client c that can use services of a host (computer) accessible through an insecure network.

20   The V is a server that provides service to the client c. It authenticates the client c by using a sequence of authentications, in which the client c is first authenticated to the AS to obtain a ticket granting ticket $ticket_{tgs}$. Using the $ticket_{tgs}$ the client c can next obtain a service granting ticket $ticket_v$. This ticket can then be used for the service. This procedure will be explained in detail with reference to Fig.s 1 and
25   2.

In order to work, the Kerberos system should already have a first shared secret (or first authentication key, K_c) known by the client c, the AS and the TGS. A second shared secret (K_v) should be known by the AS, the TGS and the service server V,
30   but not by the client c. These shared secrets are presumed to exist.

For any particular secret to be known by any particular party it is sufficient that the

3

party can, when necessary, obtain the secret, for example by asking the user (party being a client) or by requesting it from the database (party being an AS or TGS). Typically, the TGS and AS are co-located, but in some cases the Kerberos server KSS can also be distributed so that the TGS and AS are not co-located.

Operation of the Kerberos system KS as a sequence of steps is illustrated in Fig. 2. In brief, Fig. 2 shows messaging between the user, client c, authentication server AS, ticket granting server TGS and service server V. For convenience, the notation here will follow that used in the above mentioned publication of Stallings. The steps of Fig. 2 will now be described.

Step 21: The user logs on to the client c and requests a desired service on the service server (host) by sending a login and a service request. To log on, the user enters a client's password K_c that is known by him and the authentication server. The client's password is the first shared secret. From now on, K_c is referred to as a first authentication key.

Step 22: The client c sends to the AS a request for a ticket granting ticket ticket$_{tgs}$. The request comprises the ID of the client c (ID_c), the ID of the TGS (ID_{tgs}), and a first time stamp TS_1 corresponding to the time when the request was sent.

Step 23: The AS forms a ticket$_{tgs}$ using a second authentication key K_{tgs} known by the AS and the TGS but not by the client c. The ticket$_{tgs}$ = $E_{K_{tgs}}[K_{c,tgs} \parallel ID_c \parallel AD_c \parallel ID_{tgs} \parallel TS_2 \parallel Lifetime_2]$. E represents an encryption algorithm using a second authentication key K_{tgs} as its encryption key. $K_{c,tgs}$ is a first session key formed by the AS (for example, a random key) for use between the client c and the TGS. AD_c is the address of the client c, ID_{tgs} is an identity of the TGS, TS_2 is second time stamp showing the time of the issue of the ticket$_{tgs}$ and Lifetime$_2$ is the time of expiry of the ticket$_{tgs}$. The bars "$\parallel$" indicate concatenation. The ticket$_{tgs}$ is to be used later for obtaining service granting tickets (ticket$_v$) for using various services. Then the AS encrypts data using the K_c as follows: $E_{K_c}[K_{c,tgs} \parallel ID_{tgs} \parallel TS_2 \parallel Lifetime_2]$ and sends the ticket$_{tgs}$ and the encrypted data to the client c.

4

Step 24: The client c then prompts for the K_c from its user. The user should know the K_c.

5   Step 25: The user provides the client c with the K_c.

Step 26: Using the K_c and the $K_{c,tgs}$, the client c decrypts the encrypted data received from the AS and forms a first client authenticator, authenticator$_{c1}$ = $E_{K_{c,tgs}}$[$ID_c \parallel AD_c \parallel ID_V \parallel TS_3$]. ID_V is the ID of the V and TS_3 is the time of forming the

10   authenticator$_{c1}$. As a skilled reader will understand, the client c is only able to derive the $K_{c,tgs}$ if it knows the K_c. The authenticator$_{c1}$ is later used by the TGS to authenticate the client c. The client c then sends a request for a service granting ticket (ticket$_v$) to the TGS. The request contains ID_v, ticket$_{tgs}$ and authenticator$_{c1}$.

15   Step 27: The TGS forms the ticket$_v$ and sends it together with an encrypted second session key $K_{c,v}$ to the client c. The second session key is encrypted with the first session key $K_{c,tgs}$. The ticket$_v$ is formed by the TGS using the knowledge of a second shared secret K_v of the V, as follows: ticket$_v$ = E_{K_v}[$K_{c,v} \parallel ID_c \parallel AD_c \parallel ID_V \parallel TS_4 \parallel$ Lifetime$_4$], wherein:

20              $K_{c,v}$ is a second session key for use between the client c and V,

              TS_4 is a time stamp showing the time of forming the ticket$_v$, and

              Lifetime$_4$ sets the lifetime of the ticket$_v$ to prevent replay attacks after the expiry of the lifetime of the ticket$_v$.

25   Step 28: The client c sends a service request to the V. The request contains the ticket$_v$ and a second client authenticator, authenticator$_{c2}$, wherein authenticator$_{c2}$ = $E_{K_{c,v}}$[$ID_c \parallel AD_c \parallel TS_5$]. TS_5 is a time stamp showing the time of forming the second client authenticator.

30   Step 29: After the service server V has examined the authenticator$_{c2}$, it can authenticate itself to the client c for mutual authentication. This is done by replying with the TS_5, incremented by 1 and encrypted with the $K_{c,v}$, so that the client c can

5

trust that V is the correct server since it can encrypt with the same $K_{c,v}$. The reply is thus $E_{K_{c,v}}[TS_5 + 1]$.

The steps 22 and 23 occur once for each user logon session. The $ticket_{tgs}$ is thus valid for the duration of the user logon session (or until it expires). The steps 26 and 27 occur once for each type of service. In other words, for each type of service, a different $ticket_v$ is applied for and is granted. The steps 28 and 29 occur once for each service session of a granted service type.

The description of Fig. 2 illustrates how Kerberos can provide centralised authentication to a plurality of different service servers that trust the Kerberos server KSS (the combination of AS and TGS). The KSS has a different second shared secret K_V with each V and each V is registered with the KSS.

The system of Fig. 1 represents one realm: For example, a single employer in one country or city owns all the entities.

Kerberos version 5 provides some refinements over version 4, including allowing a plurality of Kerberos realms to inter-operate so that one authentication server AS can grant service granting tickets $ticket_v$ to service servers V of different authentication realms.

The operation of a Kerberos system according to Kerberos version 5 will next be described with reference to Fig. 1. In Kerberos version 5, the authentication and key distribution starts with an Authentication Service Exchange procedure, where the client c requests a $ticket_{tgs}$ from the AS, and the AS forms and sends the $ticket_{tgs}$ and other parameters encrypted with the K_c in response. The $ticket_{tgs}$ and the $K_{c,tgs}$ key will be used as credentials for obtaining service granting tickets ($ticket_v$) for using services. The Authentication Service Exchange is as follows:

(1) from c to AS message KRB_AS_REQ = Options || ID_c || $Realm_c$ || ID_{tgs} || times || $Nonce_1$

(2) from AS to c, message KRB_AS_REP = $realm_c$ II ID_c II $ticket_{tgs}$ II $E_{K_c}[K_{c,tgs}$ II times II $nonce_1$ II $realm_{tgs}$ II $ID_{tgs}]$

where $ticket_{tgs} = E_{Ktgs}[flags$ II $K_{c, tgs}$ II $realm_c$ II ID_c II AD_c II times]

and wherein

options	various options used to request that certain flags be set in the returned ticket
flags	various message flags for use in the Kerberos version 5 protocol
$realm_c$	realm of the client
$realm_{tgs}$	realm of the TGS
times	start time, expiration time and renewal time of the $ticket_{tgs}$
$nonce_1$	a random value generated by the client to ensure that the response is fresh (not a copy of an earlier response)

One should bear in mind that different types of fields may be encrypted together, because all the different types are ultimately represented by binary codes (zeros and ones), which can be operated within the same function regardless their origin.

The K_c is used to encrypt the $K_{c,tgs}$ and other parameters in the KRB_AS_REP message. It should be noted that in Kerberos, anyone can request a $ticket_{tgs}$ but only the valid client is able to use it. Because only the valid client knows the K_c, others are not able to decrypt the $K_{c,tgs}$ which is required when using the $ticket_{tgs}$. In Kerberos, the K_c is only used in the KRB_AS_REP message to encrypt the $K_{c,tgs}$ and other parameters. Different session keys are used instead of the K_c in all other Kerberos messages.

With the $ticket_{tgs}$ and $K_{c,tgs}$, the client c is able to obtain new versions of $ticket_v$ and $K_{c,v}$ from the TGS. The new versions can further be used to obtain service from the Vs.

Authentication may also be needed in mobile communications networks. At present, there are various types of mobile communications networks, with different

7

types of authentication procedures. Typically, digital mobile communications networks, such as GSM, provide digital authentication of a subscriber in order to support invoicing of the a network operator running the network. In GSM, the authentication is based on using GSM triplets, which are generated by dedicated

5   Subscriber Identity Modules (SIM) at a subscriber's end and at an Authentication Centre (AuC) of the network operator. The AuC is typically functionality provided by a Home Location Register (HLR) of a GSM network. In GSM, the GSM triplets can be used in a rather relaxed way, so that their order is not strictly fixed. In the forthcoming   Universal   Mobile   Telecommunications   System   (UMTS)   the

10 authentication differs from GSM. An overview of the authentication in UMTS is given in the 3rd Generation Partnership Project (3GPP) Technical Specification (TS) 33.102 V3.6.0 (2000-10), paragraph 6.3, and abstracted in the following:

In UMTS, the user authentication modules are referred to as UMTS subscriber

15 identity modules (USIMs) and the AuC generates authentication vectors, or quintets, which comprise the following components: a random number RAND, an expected response XRES, a cipher key CK, an integrity key IK and an authentication token AUTN. Each authentication vector is good for one authentication. RAND, XRES and CK roughly correspond to RAND, SRES and Kc

20 of GSM, but particularly AUTN and its use form a significant difference over GSM. The AUTN is based, among others, on a sequence number SQN corresponding to a particular authentication vector.

WO00/02406 provides a method, which allows clients in a mobile IP (IP, Internet

25 Protocol) network to generate a K_c by using a Subscriber Identity Module (SIM) of a GSM operator. The GSM operators have databases containing the identities of subscribers and their secret data. In GSM, the secret stored on a SIM is referred to as Ki. The SIM has capability to generate a GSM session key K_{gsm}, a one-way hashed signed response SRES of a challenge RAND based on the secret Ki. This

30 procedure of WO00/02406 is shown as a series of steps 31 to 37 in Fig. 3.

A security server SS (corresponding to a KSS) sends (step 31) an authentication

8

ID request to a terminal TE1 (corresponds to a client c). The client c responds (step 32) by its International Mobile Subscriber Identity (IMSI). The security server sends (step 33) a security information request to a proxy server. The proxy server acquires (step 34) the security information from a Home Location Register of a

5   GSM operator whose SIM is being used, containing a GSM triplet (K_{gsm}, RAND and challenge). The proxy server sends (step 35) the GSM triplet to the security server. The security server sends (step 36) the challenge RAND to the client c.

Step 37: The client c forms its own version of the GSM session key K_{gsm} and

10   SRES corresponding to its Ki and the RAND received. Then the client c sends back the SRES so that the security server can compare it against the SRES it received in the GSM triplet from the proxy server. If the SRES provided by the proxy server and the SRES generated by the client c match, a positive authentication is made and the security server can start using the GSM session

15   key K_{gsm} as the K_c between the client c and a security server (that is, a Kerberos server).

WO00/02406 combines GSM technology with Kerberos technology. Instead of authenticating a wireless mobile telephone by a GSM network by using the GSM

20   triplets and comparing different responses against each other, the SIM is used for generating a response to a challenge received from a mobile IP network. The response is then sent to the mobile IP network for comparison against the correct answer for the Ki and RAND for detecting that the client c is genuine and is not trying to illegitimately access services using an IMSI of another client.

25

According to a first aspect of the invention there is provided a method of authenticating a client, comprising the steps of:

sending client identity information to an authentication block;

obtaining at least one challenge and at least one first secret for the

30   authentication block based on a client's secret specific to the client;

forming first credentials;

forming a first authentication key using the at least one first secret;

9

encrypting the first credentials using the first authentication key;

sending the at least one challenge and the encrypted first credentials to the client;

forming the first authentication key at the client;

5   decrypting the encrypted first credentials at the client using the first authentication key; characterised in that

the encryption of the first credentials are independent of the authentication block receiving any response based on the client's secret from the client.

10   The method of the first aspect can be understood as a client sending a request message to an authentication block and directly responsive to the request message, the client receives the encrypted first credentials containing an authenticating ticket and decrypts the first credentials using the secret specific to the client. This allows the client to obtain the first credential without an

15   intermediate step of sending back to the authentication block any response based on the client's secret.

Preferably, the authentication block is located in a data communication network. Even more preferably, a network server provides the authentication block.

20

Preferably, the first credentials are encrypted before the authentication block receives any response based on the client's secret from the client.

Preferably, the encrypted first credentials are sent together with the at least one

25   challenge to the client.

Even more preferably, no response based on the client's secret is sent from the client to the authentication block. Not sending any such response makes it further possible to use the entire first secret in forming the first authentication key, which

30   cryptographically strengthens it.

Preferably, the challenge is a random code.

Preferably, the forming of the first authentication key is based on two or more first secrets. This further strengthens cryptographically the first authentication key.

5   The invented method is based on a new approach to a problem of creating a first shared secret between an authentication block and the client. In the invention, it has been realised that it is possible to form the first credentials, the first authentication key and to encrypt the first credentials with the first authentication key when the authentication block obtains the challenge and the first secret.

10   Cryptography is used for both indirect authentication and for delivery of the first credentials. Only if the client has resolved the first authentication key correctly, it can decrypt the first credentials. The client can then form a service request message using cryptographically the first decrypted credentials and so it can become authenticated as a by-product of the forming the service request

15   message. This provides significant advantages. The method allows secure and fast authentication, in which the first credentials are formed and then sent with the at least one challenge without need to first separately authenticate the client. This makes the method usable with various known authentication methods including the Kerberos versions 4 and 5 and also reduces the amount of communications

20   signals which need to be sent and received. The method further makes it unnecessary for an authentication block to store the first secret after forming the first authentication key and the first credentials. This reduces the complexity of the authentication process and makes it quicker, because some messaging becomes redundant. The authentication is also stronger, if all the data contained by the first

25   secret is used in forming the first authentication key. This was not possible in the prior art, where a signed response (SRES) was transmitted from the client to the authentication block as clear text so that any third party could have easily obtained it.

30   Preferably, the step of obtaining the at least one challenge and at least one first secret for the authentication block based on a client's secret specific to the client occurs before a need to authenticate the client. Even more preferably, a collection

11

of challenges and first secrets sufficient for forming at least two first credentials for the client is obtained in a batch. Preferable still, such collection is obtained for a group of clients so that the authentication block has the data already available for authenticating any of the clients of the group without needing to first obtain them. This allows faster authentication of a group of clients belonging to the same organisation or group as the data relating to their client's secrets are already available to the authentication block and need not be separately obtained on each authentication of a client.

Preferably, the client identity information is subscriber identity. Even more preferably, the authentication block forms an identification for use in further authentication messages for the client so that the subscriber identifier need not be included in them.

Preferably, the first authentication key is formed using a hash function of at least one first secret. Even more preferably, the first authentication key is formed using a hash function of at least the first secret and the replay attack protector. The using of the replay attack protector in forming the first authentication key and the using of a hash function makes it possible for the authentication block to authenticate to the client.

In an alternative embodiment, the forming of the first authentication key is based on a part of a first secret

Preferably, the forming of the first credentials comprises the sub-steps of:
encrypting first information corresponding to the client with a second authentication key not known by the client; and
verifying that the first information has been encrypted using the second authentication key.

Preferably, the method further comprises the step of generating a service request message using cryptographically the first decrypted credentials.

Preferably, the first information contains at least one of the items selected from a group consisting of: the identity of the client, the identity of the ticket granting server, the realm of the client, and a time stamp.

Preferably, the client is a multifunction mobile terminal having at least mobile telecommunications functionality and packet data network communications functionality. Even more preferably, the mobile telecommunications functionality supports the Global System for Mobile Communications. This provides a large base of already existing subscriber identity modules (SIMs) in use for authenticating the clients in different data communication networks other than the telecommunications networks.

Preferably, the mobile telecommunications functionality supports a telecommunications system wherein ordered authentication vectors are used.

Preferably, the at least one challenge and the at least one first secret correspond to particular at least one sequence number and convey the at least one sequence number, and the method further comprises the steps of:

maintaining a sequence number counter at the client;

obtaining at the client the sequence number using at least one of the at least one challenge and the at least one first secret; and

checking at the client if the sequence number is in a correct range about the sequence number counter.

Preferably, the method further comprises the step of initiating sequence number synchronisation in case the sequence number is not in the correct range about the sequence number counter.

Preferably, the initiating sequence number synchronisation comprises a step of forming a synchronisation request message containing at least one challenge out of the at least one challenge.

13

Preferably, the initiating sequence number synchronisation comprises a step of forming a synchronisation request message containing at the sequence number counter.

5

Preferably, the synchronisation request message further comprises a message authentication code.

Preferably, the checking the first credentials is based on the sequence number 10 and comprises the steps of maintaining a sequence number counter by the client; and determining whether at least one parameter of the first credentials have been computed using the sequence number. Preferably the determining whether at least one parameter of the first credentials have been computed using the sequence number is based on the sequence number and an exclusive or 15 operation.

According to a second aspect of the invention there is provided a method of authenticating a client, comprising the steps of:

sending client identity information to an authentication block;

20 receiving by the client at least one challenge and encrypted first credentials from the authentication block;

forming at the client a first secret based on a client's secret and the challenge;

forming a first authentication key at the client by using the first secret; and

25 decrypting the first authentication key at the client using the encrypted first credentials;

characterised in that

the decryption of the encrypted first credentials are independent of sending any response based on the client's secret from the client to the authentication 30 block.

According to a third aspect of the invention there is provided a method of

authenticating a client, comprising the steps of:

    receiving by an authentication block client identity information from a client;

    obtaining for the authentication block at least one challenge and at least one first secret based on a client's secret specific to the client;

5   forming first credentials;

    forming a first authentication key using the at least one first secret;

    encrypting the first credentials using the first authentication key;

    sending the at least one challenge and the encrypted first credentials to the client;

10   receiving from the client a message containing a first information; and

    checking if the first credentials have been used to cryptographically process the first information;

    characterised in that

    the encryption of the first credentials is independent of the authentication

15 block receiving any response based on the client's secret from the client.

According to a fourth aspect of the invention there is provided a method of authenticating a client, comprising the steps of:

    sending client identity information to an authentication block;

20   obtaining at least one challenge and at least one first secret by the authentication block based on a client's secret specific to the client;

    forming first credentials;

    forming a first authentication key using the at least one first secret;

    encrypting the first credentials using the first authentication key by the

25 authentication block;

    sending the at least one challenge and the encrypted first credentials to the client by the authentication block;

    forming the first authentication key at the client;

    decrypting the encrypted first credentials at the client using the first

30 authentication key; and

    authenticating the client by using the first credentials.

15

According to a fifth aspect of the invention there is provided an authentication system, comprising an authentication block and a client; and:

a first input at the authentication block for receiving client identity information;

5   a second input at the authentication block for receiving at least one challenge and at least one first secret based on a secret specific to the client;

a first processor at the authentication block

for forming first credentials;

for forming a first authentication key using the at least one first

10   secret; and

for encrypting the first credentials using the first authentication key;

an output at the authentication block for providing the at least one challenge and the encrypted first credentials to the client; and

a first processor at the client for forming the first authentication key and for

15   decrypting the encrypted first credentials using the first authentication key;

characterised in that

the encryption of the first credentials is independent of the authentication block receiving any response based on the client's secret from the client

20   According to a sixth aspect of the invention there is provided a client to an authentication system comprising an authentication block; the client comprising:

a first output for providing the authentication block with a client identity information;

a first input for receiving at least one challenge and encrypted first

25   credentials;

a first processor

for forming a first secret based on a client's secret and the challenge;

for forming a first authentication key by using the first secret; and

for decrypting the encrypted first credentials using the first

30   authentication key;

characterised in that

the decryption of the encrypted first credentials is independent of sending any response based on the client's secret from the client to the authentication block.

According to a seventh aspect of the invention there is provided an authentication block for an authentication system comprising a client; the authentication block comprising:

a first input for receiving client identity information;

a second input for receiving at least one challenge and at least one first secret based on a secret specific to the client;

a first processor

for forming first credentials;

for forming a first authentication key using the at least one first secret; and

for encrypting the first credentials using the first authentication key;

an output for providing the client with the at least one challenge and the encrypted first credentials;

the first input being further adapted to receive from the client a message containing a first information; and

the first processor being further adapted to check if the first credentials have been used to cryptographically process the first information;

characterised by in that

the encryption of the first credentials is independent of the authentication block receiving any response based on the client's secret from the client.

According to an eighth aspect of the invention there is provided a computer program product for controlling a client; the computer program product comprising:

computer executable code to enable the client to send client identity information to an authentication block;

computer executable code to enable the client to receive from the authentication block at least one challenge and encrypted first credentials;

computer executable code to enable the client to form a first secret based on a client's secret and the challenge;

computer executable code to enable the client to form a first authentication key by using the first secret; and

5   computer executable code to enable the client to decrypt the encrypted first credentials using the first authentication key;

characterised by in that

the decryption of the encrypted first credentials are independent of sending any response based on the client's secret from the client to the authentication 10   block.

According to a ninth aspect of the invention there is provided a computer program product for controlling an authentication block in order to enable the authentication block to authenticate a client, the computer program product comprising:

15   computer executable code to enable the authentication block to receive client identity information from a client;

computer executable code to enable the authentication block to obtain at least one challenge and at least one first secret based on a secret specific to the client;

20   computer executable code to enable the authentication block to form first credentials;

computer executable code to enable the authentication block to form a first authentication key using the at least one first secret;

computer executable code to enable the authentication block to encrypt the 25   first credentials using the first authentication key;

computer executable code to enable the authentication block to send the at least one challenge and the encrypted first credentials to the client;

computer executable code to enable the authentication block to receive from the client a message containing first information; and

30   computer executable code to enable the authentication block to check if the first credentials have been used to cryptographically process the first information; characterised by in that

18

the encryption of the first credentials are independent of receiving any response based on the secret specific to the client from the client.

5   The embodiments of one aspect also apply to various other aspects of the invention. In sake of brevity, the embodiments have not been repeated in connection with every aspect of the invention. A skilled reader will appreciate the advantages of the various aspects based on the advantages of the first aspect of the invention.

10   The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Fig. 1   shows an overview of a Kerberos system according to Kerberos version 4;

Fig. 2   shows the operation of the Kerberos system of Fig. 1;

15   Fig. 3   shows an authentication procedure of WO 0002406;

Fig. 4   is a block diagram showing a client according to a preferred embodiment of the invention;

Fig. 5   is a block diagram showing an authentication server according to the preferred embodiment of the invention;

20   Fig. 6   shows the operation of a Kerberos system modified according to a preferred embodiment of the invention;

Fig. 7   shows a block diagram of a Wireless Local Area Network authentication system according to an embodiment of the invention;

Fig. 8   shows an authentication procedure of the authentication system of

25   Fig. 7;

Fig. 9   shows an authentication procedure at the client according to yet another embodiment of the invention; and

Fig. 10   shows the construction of the parameter AUTS.

Figs 1 to 3 have been described in the foregoing.

30

Fig. 4 is a block diagram showing a client c according to a preferred embodiment of the invention. The client c comprises a telephony functionality block Tel, an IP

19

terminal functionality block IP for connecting to an IP network, a non-volatile memory ROM, a random access memory RAM$_c$, a user interface UI$_c$, a SIM reader with a SIM therein, software SW$_c$ stored in the ROM$_c$, and a central processing unit CPU$_c$ for running the software$_c$ and controlling the operation of the client c

5   accordingly. The telephony functionality block Tel provides conventional telephony functionality such as making telephone calls and modern communication functionality such as making data calls, sending or receiving facsimiles, e-mails. Typically, the Tel is compatible with the GSM phase 2+. It may further support the General Packet Radio Service (GPRS), which is a packet based communications

10   service built on GSM. In that case, the client c supports two different kinds of packet data networks. The operation of the client c will be described in detail with reference to Fig. 6.

Fig. 5 shows a block diagram of an authentication server AS according to the preferred embodiment of the invention. The authentication server AS comprises an

15   Input/Output block IO$_{AS}$, a key database (possibly geographically distributed) DB for storing pass keys as such or as hashed, a non-volatile memory ROM$_{AS}$, a random access memory RAM$_{AS}$, software SW$_{AS}$ stored in the ROM$_{AS}$, an access to an Authentication Centre AuC of a telecommunication network (typically of a

20   GSM network), and a central processing unit CPU$_{AS}$ for running the software$_{AS}$ and controlling the operation of the AS accordingly. The operation of the authentication server will be described in detail with reference to Fig. 6.

Fig. 6 shows the operation of a Kerberos system modified according to the

25   preferred embodiment of the invention. The system comprises the client c of Fig. 4 and the authentication server AS of Fig. 5. Corresponding reference numerals have been applied to corresponding messages and steps described in relation to Fig.s 1 and 2. The steps will now be described.

30   Step 61: The SIM provides the International mobile subscriber identity (IMSI) of a telecommunications network subscriber (whose SIM it is) to a client c (mobile node, the ID of the TGS (ID$_{tgs}$), and a first time stamp or a random number (as a

20

replay attack protector, or nonce$_1$) corresponding to the time when the request was sent.

Step 62: The client c sends a KRB_AS_REQ message, that is, a ticket$_{tgs}$ request, comprising the IMSI, the ID$_{tgs}$ and the nonce$_1$ to the AS.

Step 63: The AS requests for n (one or more) GSM triplets from an AuC of the mobile telecommunications network that is identified by the IMSI. These triplets are formed using a cryptographic function and subscriber's secret known both by the SIM and the AuC.

Step 64: The AuC replies with one or more sets of challenges (RAND) and GSM session keys (K$_{gsm}$) and typically also corresponding signed responses (SRES). The AS forms a first authentication key K$_c$ using the n GSM session keys K$_{gsm}$ and/or signed responses SRES of the GSM triplets as follows: K$_c$ = hash$_1$ [n x K$_{gsm}$, n x SRES, nonce$_1$], wherein hash$_1$ is a first hash function, which is a one-way hash function known both by the client c and the AS. x is a notation of n K$_{gsm}$ parametres, not of a multiplication. According to the preferred embodiment of the invention, the signed responses are not compared at all (and therefore not transmitted in clear text) so that the received SRESs can also be used in forming the K$_c$. Use of more secret data in forming the K$_c$ increases its cryptographic strength. Alternatively, only GSM session keys K$_{gsm}$ or signed responses SRESs can be used. Furthermore, in generating the first authentication key K$_c$ the number of GSM session keys K$_{gsm}$ used may differ from the number of SRESs used. It is only necessary for the client c to know how the K$_c$ is generated. The K$_c$ will serve in authentication between the AS and the client c. Furthermore, a first session key K$_{c,tgs}$ is formed by the AS. The K$_{c,tgs}$ can be, for example, a random key generated by the AS.

Step 23': The AS forms a ticket granting ticket ticket$_{tgs}$ as has been described in the foregoing in relation to the prior art section. Step 23' differs from step 23 described in the prior art section so that the AS sends also the n RANDs that have

21

been used in generating the K_c in addition to the ticket$_{tgs}$ and the $K_{c,tgs}$ encrypted with the K_c. The message sent from the AS to the c in step 23' can be referred to as a KRB_AS_REP message.

5   Step 65: The client c gives the n RANDs to the SIM, which forms corresponding n pairs of SRES and K_{gsm} values.

Step 66: The SIM gives the n pairs of SRES and K_{gsm} values formed in the previous step to the client c. Next, the client c forms an own version of the K_c using

10   the SRES and the K_{gsm} values in a similar fashion that the AS had earlier done. After having its own version of the K_c, the operation of the system then follows steps 26 to 29 of the standard Kerberos version 5 protocol explained in the foregoing with reference to Fig. 2.

15   Steps 24 and 25 are replaced by steps 65 and 66, because the authentication can take place automatically if the user has accepted access to his SIM.

As mentioned in the foregoing, the IMSI is sent from the client c to the AS and then RANDs are sent from the AS to the client c. This messaging can

20   implemented in various manners, among which the implementation according to the preferred embodiment is next described.

Kerberos version 5 authentication service exchange comprises an initial transmission of optional pre-authentication data (PA_DATA) from the client c to

25   the AS. The presence of the pre-authentication data is shown in a flag PRE-AUTHENT. The use of PA_DATA is not standardised but, according to Stallings, "the MIT implementation of version 5 has encrypted timestamp pre-authentication block containing a random confounder, a version number, and a timestamp, encrypted in the client's password-based key". The "pre-authentication block", or

30   data, is then decrypted by the AS. The AS can then verify the true authenticity of the client c and send tickets only if the pre-authentication will be confirmed. Stallings continues by describing another possibility that utilises a smart card that

22

generates a series of passwords each having its own limited period of validity. The passwords can be based on the user's password, but as they change, the passwords transmitted are in effect arbitrary and are difficult to determine. Use of a smart card reader can be indicated by a HW_AUTHENT flag, which identifies the

5   protocols which require use of hardware that is expected to be only in the possession of the correct client c.

In the preferred embodiment of the invention, the PA_DATA and HW_AUTHENT flags are utilised in the present invention so that the IMSI can be transmitted in the

10   PA_DATA field and the HW_AUTHENT flag can be used to indicate the use of a SIM for authentication. Instead of using the PA_DATA for any pre-authentication, the AS requests, responsive to a dedicated value of the HW_AUTHENT flag, GSM triplets from the AuC of the subscriber. The correct AuC is found by using the IMSI.

15

The AS sends the n RANDs to the client c in a standard Kerberos version 5 message KRB_AS_REP, in a pre-authentication data (PA_DATA) field. After receiving the RANDs, the client c can form its own version of the K_c and decrypt the $K_{c,tgs}$.

20

In the preferred embodiment, the PA_DATA field is used for sending the IMSI from the client c to the AS. As the client's ID ID_c, a fake ID_c that is not the true ID of the client (for example a random value or a constant such as zero), is used as the ID_c. The (fake) ID_c is embedded in all the following authentication messages in which

25   tickets are requested or granted. As an advantage of sending the IMSI in the PA_DATA field, the IMSI will not become part of a series of further messages. This is good since the IMSI identifies the subscriber. For security reasons, it is desirable to limit its general availability. Use of a pre-authentication flag and data fields is also advantageous, in order to provide a standardised way to indicate to

30   the AS that a method of using a SIM-authentication according to the invention is being used. Standard Kerberos version 5 can be used with small changes and no proprietary protocols need to be run first in order to obtain the first session key

23

$K_{c,tgs}$ for use in the Kerberos version 5 protocol.

It was also mentioned in the previous paragraph that the client's ID ID_c can be given an arbitrary value. Furthermore, the ID_c can be chosen later on by the AS.

5   The ID_c is sent back from the AS as cleartext so that it does not matter if the ID_c changes after the client c has sent the first message with an arbitrary initial ID_c. It is advantageous for the AS to choose the ID_c because it provides an opportunity for centralised allocation of identities so that each identity can be unique during its life-time.

10

Fig. 7 shows a block diagram of a Wireless Local Area Network authentication system 70 according to an embodiment of the invention. The system 70 comprises a client c, an access point AP, a Kerberos key distribution centre KSS containing both a Kerberos Authentication Server (AS, not shown in Fig. 7) and a Ticket-

15   Granting Server (TGS, not shown in Fig. 7). The AP functions as a proxy server between the client c and the KSS, as will next be illustrated with reference to Fig. 8. Additionally, the AP contains Kerberos Service Server (V, not shown in Fig. 7) functionality.

20   Fig. 8 shows an authentication procedure of the authentication system 70 of Fig. 7. The procedure starts from steps 810 and 812, in which the AP sends advertisements informing the client c about itself and the client c associates with the AP. Next, an Extensible Authentication Protocol (EAP) identity request message is sent by the AP (step 814) to the client c. The client c replies with an

25   EAP Identity Response (step 816). The AP then sends an EAP-GSS Request (step 818) to the client c. All these steps 810 to 816 are familiar to a person skilled in the art, for example from a publication "TGe Security Baseline", November 2000, by D. Halasz, S. Norman, G. Zorn, B. Aboba, T. Moore, J. Walker, B. Beach, B. O'Hara, slide 18, (IEEE 802.11-00/419).

30

Next, the client c forms (step 820) a message AS_REQ, which corresponds to the KRB_AS_REQ explained in the foregoing and then the client c sends the message

24

to the AP encapsulated by IAKERB and further EAP-GSS protocols. Both IAKERB
and EAP-GSS protocols are known to a person skilled in the art, see for example
"Generic Security Service Application Program Interface, Version 2, Update 1"
(RFC 2743), January 2000, by J. Linn and "Initial Authentication and Pass
5   Through Authentication Using Kerberos V5 and the GSS-API (IAKERB)",
November 2000, by M. Swift, J. Trostle, B. Aboba and G. Zorn (draft-ietf-cat-
iakerb-05.txt).

The AP forwards (step 822) the AS_REQ message to the KSS, which replies (step
10   824) with an AS_REP message to the AP. The AP forwards (step 826) the
AS_REP encapsulated by the IAKERB and EAP-GSS protocols to the client c. The
AS_REP corresponds to the KRB_AS_REP explained in the foregoing.

In steps 828 to 834 a ticket service granting ticket is requested and granted to the
15   client c.

As was mentioned in description of Fig. 7, the AP has two roles. The AP operates
as an IAKERB proxy when it forwards the clients AS_REQ/AS_REP and
TGS_REQ/TGS_REP messages (steps 820 to 834). In addition, the AP contains a
20   Kerberos Service Server (V), for example for providing access to a network, such
as the Internet. In steps 828 to 834, the client c obtains a ticket$_v$ for the AP from
the KSS. In steps 840 and 842 (AP_REQ and AP_REP), the client c uses the
ticket$_v$ to obtain a service from a service server, for example an access to the
Internet through the AP.
25

Typically, a separate session key will be used between the client and the access
point (distributed in steps 840 to 842) and the SIM-generated key will only be used
in the authentication service exchange.

30   In yet another alternative embodiment, the IMSI can be transmitted from the client
c to the AP in the EAP Identity Response message (step 816), in which case it
need not be transmitted in the AS_REQ message.

25

Fig. 9 shows an authentication sub-procedure at the client according to yet another embodiment of the invention. In this embodiment the client has a UMTS SIM USIM instead of a GSM SIM. On describing the process at the client the

5   process at the network end becomes also clear to a skilled person. The sub-procedure corresponds to the UMTS Authentication and Key Agreement (AKA) procedure and is used to obtain the UMTS quintet. The UMTS quintet contains 5 data items: a challenge RAND, an expected response XRES that should match with a response RES that the USIM generates, a cipher key CK, an integrity key IK

10   and a network Authentication TokeN AUTN. The UMTS quintet is typically received in the PA_DATA field, as described earlier with reference to Fig. 6.

The sub-procedure exemplifies how a sequence number SQN can be embedded in the authentication and how it can be checked and further re-synchronised in

15   case it is out of synchronisation.

The UMTS quintet has been generated typically by an AuC of a UMTS operator of the subscriber (USIM) using a shared secret K (corresponding to K_i, shared secret in GSM). The quintet is formed such that only two data items need to be

20   transmitted to the USIM to enable it to obtain the entire quintet, namely the RAND and the AUTN. The client receives these two data items. The USIM then obtains the quintet using the AUTN, the RAND and the K. Typically, the USIM generates RES, CK and IK using just the K and the RAND, with respective three different authentication functions f2 to f4 known both by the USIM and the AuC.

25

The USIM also generates an expected message authentication code XMAC using the RAND, AUTN and K. The AUTN contains a field SQN $\oplus$ AK, wherein AK is an anonymity key, an Authentication Management Field AMF, and a Message Authentication Code MAC. The first-mentioned field allows the USIM to obtain the

30   XMAC, to be compared against the MAC. The USIM first generates the AK using RAND and K with an authentication function f5. Next, the USIM computes (SQN $\oplus$ AK) $\oplus$ AK and obtains the SQN (note: the term of the formula that is in brackets is

26

the field of AUTN and the AK in the end of the formula is obtained by the USIM).
The USIM can then compute the XMAC with the K, the SQN, the AMF and the
RAND, using a first authentication function f1.

5   The USIM compares the XMAC with the MAC which was included in the AUTN. If
they are different, the client sends a user authentication reject message back to
the AuC with an indication of the cause and the client abandons the ongoing
authentication procedure. In this case, the AuC may initiate a new identification
and authentication procedure towards the client.

10

The USIM also verifies that the received sequence number SQN is in the correct
range. The SQN may not differ more than by a predetermined amount of the SQN
held by the USIM. If the USIM considers the sequence number not to be in the
correct range, it sends synchronisation failure message back to the AuC including
15   an appropriate parameter, and abandons the ongoing procedure.

The above-described sub-procedure fits in the framework of the Kerberos
Authentication Service Exchange. It is further explained in the following in the
framework of Kerberos based authentication service exchange.

20

The client c requests for a $ticket_{tgs}$ by sending a KRB_AS_REQ message to the
AS. The message has the following basic format:
Options || ID_c || IMSI || $Realm_c$ || ID_{tgs} || times || $Nonce_1$

25   The KRB_AS_REQ message is as in standard Kerberos, except that it contains
the client's IMSI. The IMSI may be transmitted in the client identity field (ID_c), for
example using the Kerberos name type PRINCIPAL, or a new name type reserved
for UMTS. Kerberos supports various authentication mechanisms with the pre-
authentication data (padata) field of the KRB_AS_REQ and KRB_AS_REP
30   messages.

In an alternative embodiment the IMSI is transmitted using the Kerberos padata field. This has the advantage that the client uses an identity other than the IMSI as the ID_c in all Kerberos messages, and IMSI has to be transmitted only once.

5   In yet another alternative embodiment, to avoid sending the IMSI in the subsequent Kerberos messages, the AS chooses an identity for the client c, generates the ticket for this new identity and transmits the identity with the $ticket_{tgs}$ of the KRB_AS_REP message.

10   The AS responds by a KRB_AS_REP message to the client c. The message KRB_AS_REP has the following basic format:

$Realm_c || ID_c || Ticket_{tgs} || n$ $RANDs || n$ $AUTNs || E_{Kc}[K_{c,}$ $_{tgs} || times || Nonce_1 || Realm_{tgs} | ID_{tgs}]$

15   where n is an integer (at least 1), $K_c = h(n$ CK, n Ik, $Nonce_1)$ and the function h() is a one-way hash function. In an alternative embodiment, $K_c = h(n$ CK, n IK, n RES, $Nonce_1)$

The KRB_AS_REP message is similar to the prior art Kerberos correspondent 20   except that it contains n RANDs and AUTNs. The RANDs and AUTNs can be contained in the padata field of the KRB_AS_REP message.

On receipt of KRB_AS_REP, the client first verifies the n AUTNs as in standard UMTS AKA. If the n AUTN parameters check out properly, the client runs the 25   UMTS AKA algorithms on the USIM and derives the K_c from the n quintets and $Nonce_1$. Then the client is able to decrypt the encrypted portion of KRB_AS_REP and verify it, like in normal Kerberos authentication. If the verifications are successful, the client has obtained a ticket-granting ticket and a ticket-granting server session key. From this point onwards, the client operates as any other 30   Kerberos client. The client does not need the USIM until the $ticket_{tgs}$ expires and the client needs to request a new $ticket_{tgs}$ by running the Authentication Service

28

Exchange again (unless the USIM is needed for other purpose such as placing an ordinary UMTS telephone call).

As in standard Kerberos, in the UMTS AKA case the AS is also unable to verify
5   that the KRB_AS_REQ is coming from a legitimate client c. On receipt of the KRB_AS_REQ message, the AS fetches UMTS quintets for the client, generates the K_c key and sends the KRB_AS_REP message. The AS needs not save the K_c key or any other status information for the client.

10   If the ticket was requested by a legitimate client (that is, the client c possessing the USIM having the IMSI used), the client can derive the key K_c and decrypt the encrypted portion of the KRB_AS_REP message and obtain the $ticket_{tgs}$. As in standard Kerberos, only legitimate clients c are able to use the $ticket_{tgs}$ received in the KRB_AS_REP message.
15
Next, the client c obtains the SQN out of at least one rand and AUTN (typically the first ones of the n RANDs and AUTNs) and checks whether it is in the correct range.

20   If the SQN is in the correct range (not too far from the SQN_{MS}), the client c approves the $ticket_{tgs}$ and can use it. Otherwise, the client c sends a new KRB_AS_REQ as a re-synchronisation request message (in step (3)) containing an AUTS corresponding to the first RAND and AUTN. The AUTS is a parameter used to re-synchronise the SQN. The construction of the parameter AUTS is
25   shown in Figure 10. There a MAC-S (Message Authentication Code for the re-Synchronisation) is formed to be a part of the AUTS. The KRB_AS_REQ message used now has the following basic format:
Options II ID_c II IMSI II RAND II AUTS II $Realm_c$ II ID_{tgs} II times II $Nonce_1$

30   Responsive to the re-synchronisation request message, the AS causes the AuC to synchronise its SQN with the USIM (to SQN_{MS}), retrieves a new set of UMTS quintets and sends them to the client c a new KRB_AS_REP message which is

29

now formed using the synchronised SQN (i.e. where the RANDs and AUTNs are based on SQNs in syncronisation with the USIM's SQN_{MS}). The KRB_AS_REP now has the following basic format:

$Realm_c \, ||ID_c||Ticket_{tgs}|| \, n \, RANDs||n \, AUTNs||E_{Kc}[K_{c, \, tgs}||times||Nonce_1|| \, Realm_{tgs} \, ||$

5    $ID_{tgs}]$

It is a remarkable advantage of this embodiment that UMTS authentication can be extended to Kerberos compliant Ticket Granting server and Kerberos Service Servers (also known as application servers) without any modifications to them. It

10   suffices that the Kerberos client and the AS are UMTS AKA aware. The Kerberos TGS and service servers V need not to be UMTS AKA aware. The AS may have an interface to the UMTS authorisation network, similarly as the network Operator Wireless LAN (OWLAN) AS to the GSM network. The Nokia Authentication Server is an example of such an OWLAN AS.

15

The different embodiments of the invention allow use of various telecommunications network identifying modules, including SIMs and USIMs, for authenticating clients to various other data networks or their services using tickets that grant the access to them or their services. For example, a UMTS mobile

20   telecommunication device can use both UMTS telecommunications services provided by its telecommunications operator (over radio interface) and Wireless (and/or wired) LAN services. The device can obtain a strong and relatively reliable first authentication key or session key K_c based on the device's user identification module and use that session key without need to send back any "signed

25   response" such as RES or SRES and thus that data can further be used in creation of the session key.

Moreover, the generation of the session key based on the mobile telecommunications network's credentials (GSM triplet data or UMTS quintet data)

30   allows fast handovers for access point roaming.

Particular implementations and embodiments of the invention have been described. It is clear to a person skilled in the art that the invention is not restricted

30

to details of the embodiments presented above, but that it can be implemented in other embodiments using equivalent means without deviating from the characteristics of the invention. The scope of the invention is only restricted by the attached patent claims.

31

Claims

1. Method of authenticating a client (c), comprising the steps of:

   sending client identity information (IMSI) to an authentication block (AS);

   obtaining at least one challenge (RAND) and at least one first secret (K_{gsm},

5   SRES;CK,IK,RES) for the authentication block (AS) based on a client's secret (Ki)

   specific to the client (c);

   forming first credentials ($K_{c,tgs}$);

   forming a first authentication key (K_c) using the at least one first secret

   (K_{gsm},SRES;CK,IK,RES);

10   encrypting the first credentials ($K_{c,tgs}$) using the first authentication key (K_c);

   sending the at least one challenge (RAND) and the encrypted first

   credentials ($K_{c,tgs}$) to the client (c);

   forming the first authentication key (K_c) at the client (c); and

   decrypting the encrypted first credentials ($K_{c,tgs}$) using the first

15   authentication key (K_c) at the client; **characterised** by

   the encryption of the first credentials ($K_{c,tgs}$) being independent of the

   authentication block (AS) receiving any response based on the client's secret

   (Ki;K) from the client (c).

20   2. A method according to claim 1, **characterised** by the first credentials ($K_{c,tgs}$)

   being encrypted before the authentication block (AS) receives any response

   based on the client's secret (Ki;K) from the client (c).

   3. A method according to claim 1 or 2, **characterised** by the sending of the at

25   least one challenge and the encrypted first credentials occurring in a same

   message.

   4. A method according to any of the preceding claims, **characterised** by the at

   least one challenge (RAND) and the at least one first secret corresponding to

30   particular at least one sequence number (SQN) and conveying the at least one

   sequence number (SQN), and the method further comprising the steps of:

   maintaining a sequence number counter (SQN_{MS}) at the client (c);

32

obtaining at the client (c) the sequence number (SQN) using at least one of the at least one challenge (RAND) and the at least one first secret (K_{gsm},SRES; CK,IK,RES); and

checking at the client (c) if the sequence number (SQN) falls within a
5   predetermined range.

5.   A method according to claim 4, **characterised** by the method further comprising the step of initiating a sequence number synchronisation in case the sequence number (SQN) does not fall within the predetermined range.
10

6.   A method according to claim 5, **characterised** by the initiation of the sequence number synchronisation comprises a step of forming a synchronisation request message containing at least one challenge (RAND) out of the at least one challenge.
15

7.   A method according to any of claim 5 to 6, **characterised** by the initiation of the sequence number synchronisation comprising a step of forming a synchronisation request message containing at least the sequence number counter (SQN_{MS}).
20

8.   A method according to any of claims 5 to 7, **characterised** by the initiation of a sequence number synchronisation comprising a message authentication code (MAC-S).

25   9. A method according to any of the preceding claims, **characterised** in that no response based on the client's secret (Ki) is sent from the client (c) to the authentication block (AS).

10. A method according to any of the preceding claims, **characterised** in that
30   the forming of the first authentication key (K_c) is based on two or more first secrets.

33

11. A method according to any of the preceding claims, **characterised** in that the step of obtaining the at least one challenge (RAND) and at least one first secret (K_{gsm}, SRES) to the authentication block (AS) based on a client's secret (Ki) specific to the client (c) occurs before a need to authenticate the client.

5

12. A method according to any of the preceding claims, **characterised** in that the client identity information is subscriber identity.

13. A method according to any of the preceding claims, **characterised** by the method further comprising the step of forming by the authentication block an identification for use in a following authentication message for the client.

14. A method according to any of the preceding claims, **characterised** by the method further comprising the step of receiving a replay attack protector

15 ($nonce_1$) from the client to the authentication block; and the forming of the first authentication key comprising a sub-step of using a hash function of at least the first secret and the replay attack protector.

15. A method according to any of the preceding claims, **characterised** by the

20 forming of the first credentials comprising the sub-steps of:

encrypting first information (ID_c) corresponding to the client with a second authentication key (K_{tgs}) not known by the client (c); and

verifying that the first information has been encrypted using the second authentication key (K_{tgs}).

25

16. A method according to any of the preceding claims, **characterised** by the method further comprising the step of generating a service request message using cryptographically the first decrypted credentials.

30   17. Method of authenticating a client (c), comprising the steps of:

sending client identity information (IMSI) to an authentication block (AS);

receiving by the client at least one challenge (RAND) and encrypted first credentials ($K_{c,tgs}$) from the authentication block (AS);

forming at the client a first secret (K_{gsm}, SRES) based on a client's secret (Ki) and the challenge (RAND);

5   forming at the client (c) by using the first secret (K_{gsm}, SRES) a first authentication key (K_c); and

decrypting the encrypted first credentials ($K_{c,tgs}$) using the first authentication key (K_c) at the client; **characterised** by

the decryption of the encrypted first credentials ($K_{c,tgs}$) being independent of
10   sending any response based on the client's secret (Ki) from the client (c) to the authentication block (AS).

18. Method of authenticating a client (c), comprising the steps of:

receiving by an authentication block (AS) client identity information (IMSI)
15   from a client (c) ;

obtaining for the authentication block (AS) at least one challenge (RAND) and at least one first secret (K_{gsm}, SRES) based on a client's secret (Ki) specific to the client (c);

forming first credentials ($K_{c,tgs}$);

20   forming a first authentication key (K_c) using the at least one first secret (K_{gsm},SRES);

encrypting the first credentials ($K_{c,tgs}$) using the first authentication key (K_c);

sending the at least one challenge (RAND) and the encrypted first credentials ($K_{c,tgs}$) to the client (c);

25   receiving from the client (c) a message containing a first information; and

checking if the first credentials have been used to cryptographically process the first information; **characterised** by

the encryption of the first credentials ($K_{c,tgs}$) being independent of receiving any response based on the client's secret (Ki) from the client (c) to the
30   authentication block (AS).

19. Authentication system, comprising an authentication block (AS) and a client (c);

35

and:

   a first input (IO_{AS}) at an authentication block (AS) for receiving client identity information (IMSI);

   a second input (IO_{AS}) at the authentication block (AS) for receiving at least
5   one challenge (RAND) and at least one first secret (K_{gsm}, SRES) based on a client's secret (Ki) specific to the client (c);

   a first processor (CPU_{AS}) at the authentication block (AS)

        for forming first credentials ($K_{c,tgs}$);

        for forming a first authentication key (K_c) using the at least one first
10   secret (K_{gsm},SRES); and

        for encrypting the first credentials ($K_{c,tgs}$) using the first authentication key (K_c);

   an output (IO_{AS}) at the authentication block (AS) for providing the at least one challenge (RAND) and the encrypted first credentials ($K_{c,tgs}$) to the client (c);
15   and

   a first processor (CPU_c) at the client (c) for forming the first authentication key (K_c) and for decrypting the encrypted first credentials ($K_{c,tgs}$) using the first authentication key (K_c); **characterised** by

   the encryption of the first credentials ($K_{c,tgs}$) being independent of receiving
20   any response based on the client's secret (Ki) from the client (c) to the authentication block (AS).

20. Client (c) to an authentication system comprising an authentication block (AS);
        the client comprising:

25   a first output (IO_c) for providing the authentication block (AS) with a client identity information (IMSI);

   a first input (IO_c) for receiving at least one challenge (RAND) and encrypted first credentials ($K_{c,tgs}$); and

   a first processor (CPU_c)
30   for forming a first secret (K_{gsm}, SRES) based on a client's secret (Ki) and the challenge (RAND);

for forming a first authentication key (K_c) by using the first secret (K_{gsm}, SRES); and

for decrypting the encrypted first credentials ($K_{c,tgs}$) using the first authentication key (K_c);

characterised by

the encryption of the first credentials ($K_{c,tgs}$) being independent of receiving any response based on the client's secret (Ki) from the client (c) to the authentication block (AS).

21. An authentication block (AS) for an authentication system comprising a client (c); the authentication block comprising:

a first input (IO_{AS}) for receiving client identity information (IMSI);

a second input (IO_{AS}) for receiving at least one challenge (RAND) and at least one first secret (K_{gsm}, SRES) based on a client's secret (Ki) specific to the client (c);

a first processor (CPU_{AS})

for forming first credentials ($K_{c,tgs}$);

for forming a first authentication key (K_c) using the at least one first secret (K_{gsm}, SRES); and

for encrypting the first credentials ($K_{c,tgs}$) using the first authentication key (K_c);

an output (IO_{AS}) for providing the client with the at least one challenge (RAND) and the encrypted first credentials ($K_{c,tgs}$);

the first input (IO_{AS}) being further adapted to receive from the client (c) a message containing a first information; and

the first processor (CPU_{AS}) being further adapted to check if the first credentials have been used to cryptographically process the first information;

characterised by

the encryption of the first credentials ($K_{c,tgs}$) being independent of receiving any response based on the client's secret (Ki) from the client (c) to the authentication block (AS).

22. Computer program product for controlling a client; the computer program product comprising:

computer executable code to enable the client to send client identity information (IMSI) to an authentication block (AS);

5   computer executable code to enable the client to receive from the authentication block (AS) at least one challenge (RAND) and encrypted first credentials $(K_{c,tgs})$;

computer executable code to enable the client to form a first secret $(K_{gsm}, SRES)$ based on a client's secret (Ki) and the challenge (RAND);

10   computer executable code to enable the client to form a first authentication key (K_c) by using the first secret $(K_{gsm}, SRES)$; and

computer executable code to enable the client to decrypt the encrypted first credentials $(K_{c,tgs})$ using the first authentication key (K_c); **characterised** by

the decryption of the encrypted first credentials $(K_{c,tgs})$ being independent of

15   sending any response based on the client's secret (Ki) from the client (c) to the authentication block (AS).

23. Computer program product for controlling a computer, for causing the computer to authenticate a client (c), the computer program product

20   comprising:

computer executable code to enable the computer to receive client identity information (IMSI) from a client (c) to an authentication block (AS);

computer executable code to enable the computer to obtain at least one challenge (RAND) and at least one first secret $(K_{gsm}, SRES)$ to the authentication

25   block (AS) based on a client's secret (Ki) specific to the client (c);

computer executable code to enable the computer to form first credentials $(K_{c,tgs})$;

computer executable code to enable the computer to form a first authentication key (K_c) using the at least one first secret $(K_{gsm}, SRES)$;

30   computer executable code to enable the computer to encrypt the first credentials $(K_{c,tgs})$ using the first authentication key (K_c);

38

computer executable code to enable the computer to send the at least one challenge (RAND) and the encrypted first credentials ($K_{c,tgs}$) to the client (c);

computer executable code to enable the computer to receive from the client (c) a message containing a first information; and

5   computer executable code to enable the computer to check if the first credentials have been used to cryptographically process the first information; **characterised** by

the encryption of the first credentials ($K_{c,tgs}$) being independent of receiving any response based on the client's secret (Ki) from the client (c) to the
10   authentication block (AS).

24. Computer program product for controlling a data communications network entity; the computer program product comprising:

computer executable code to enable the data communications network
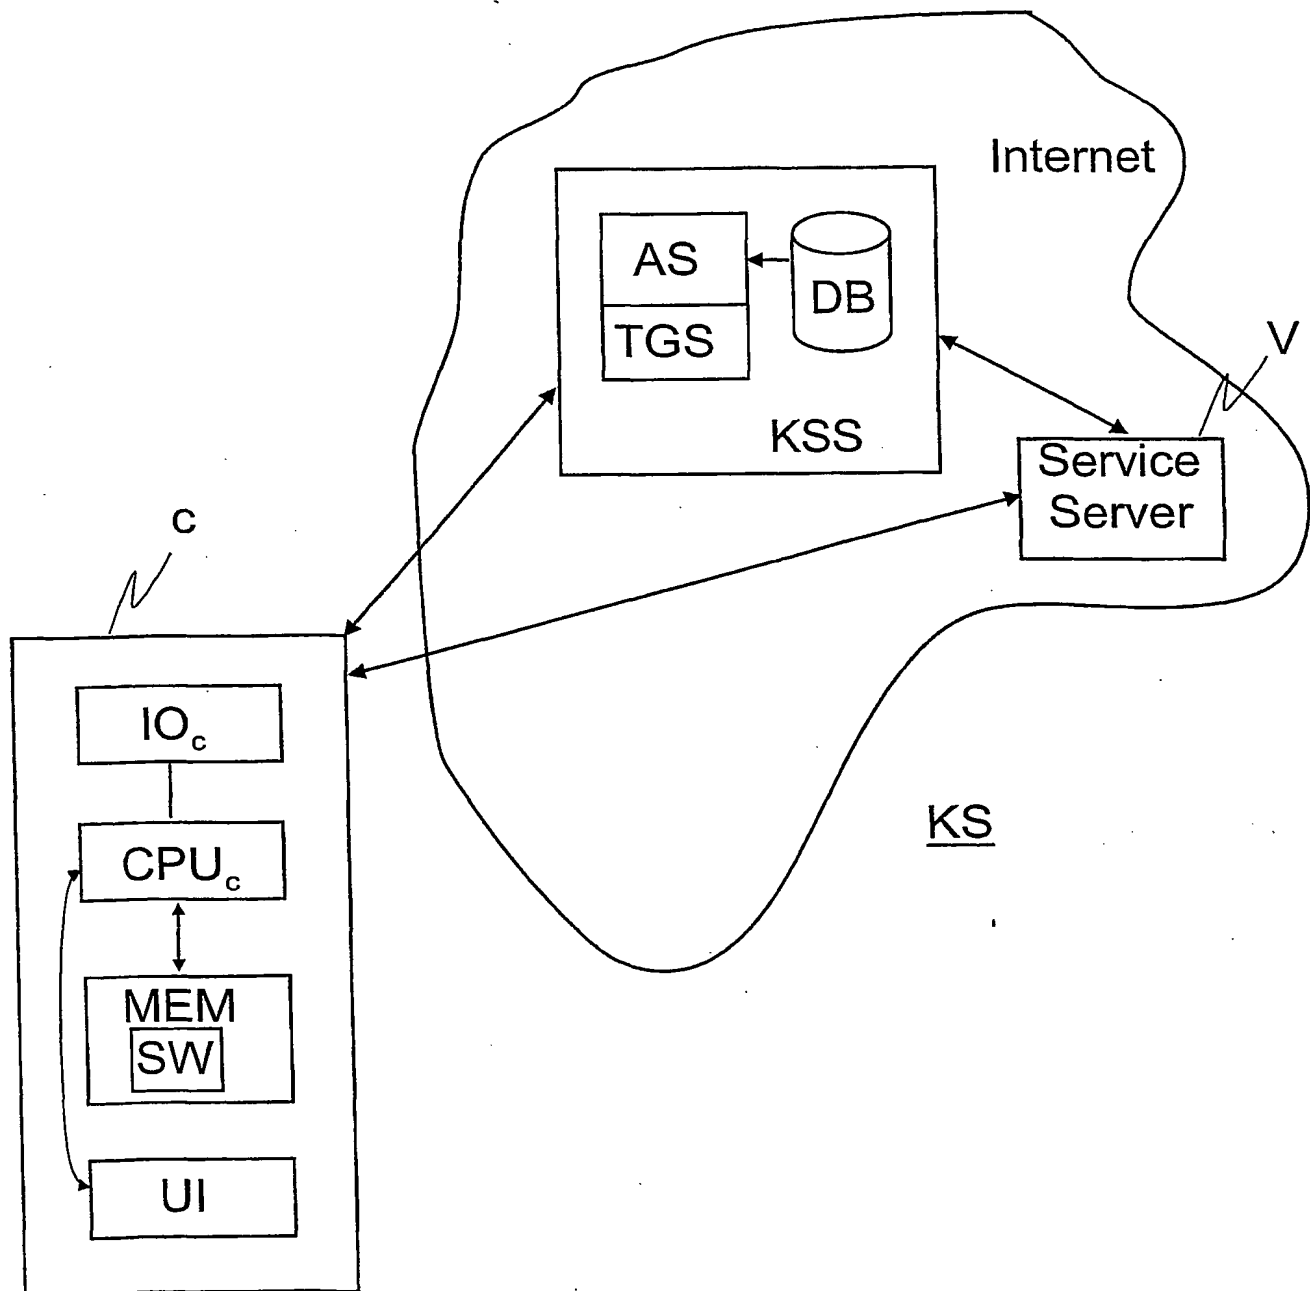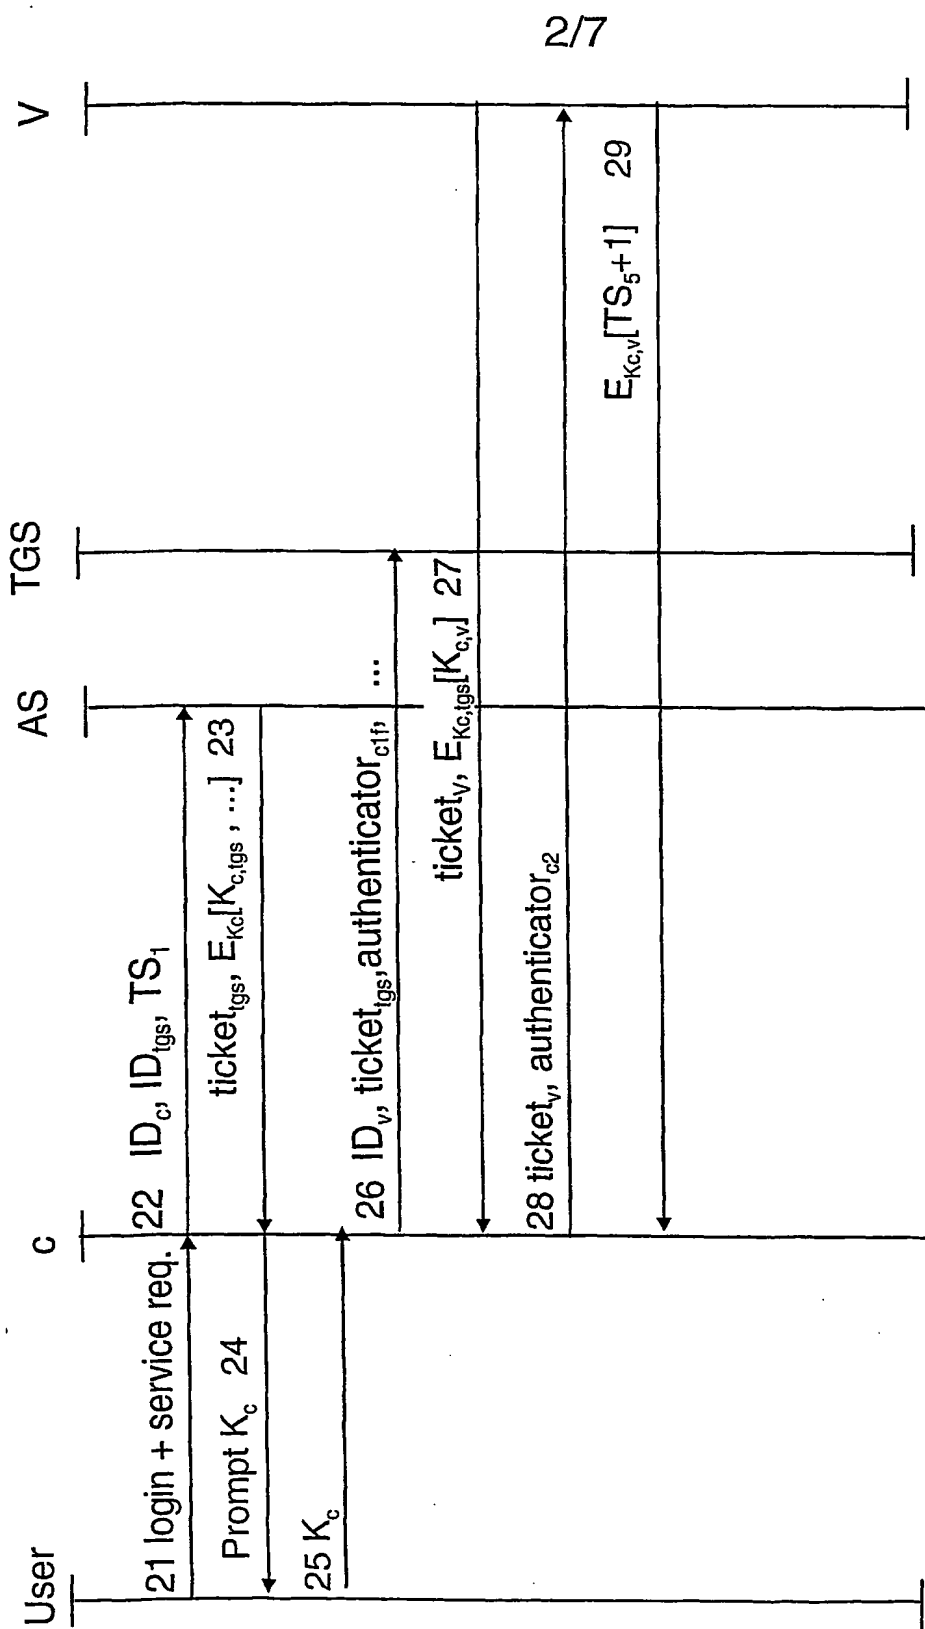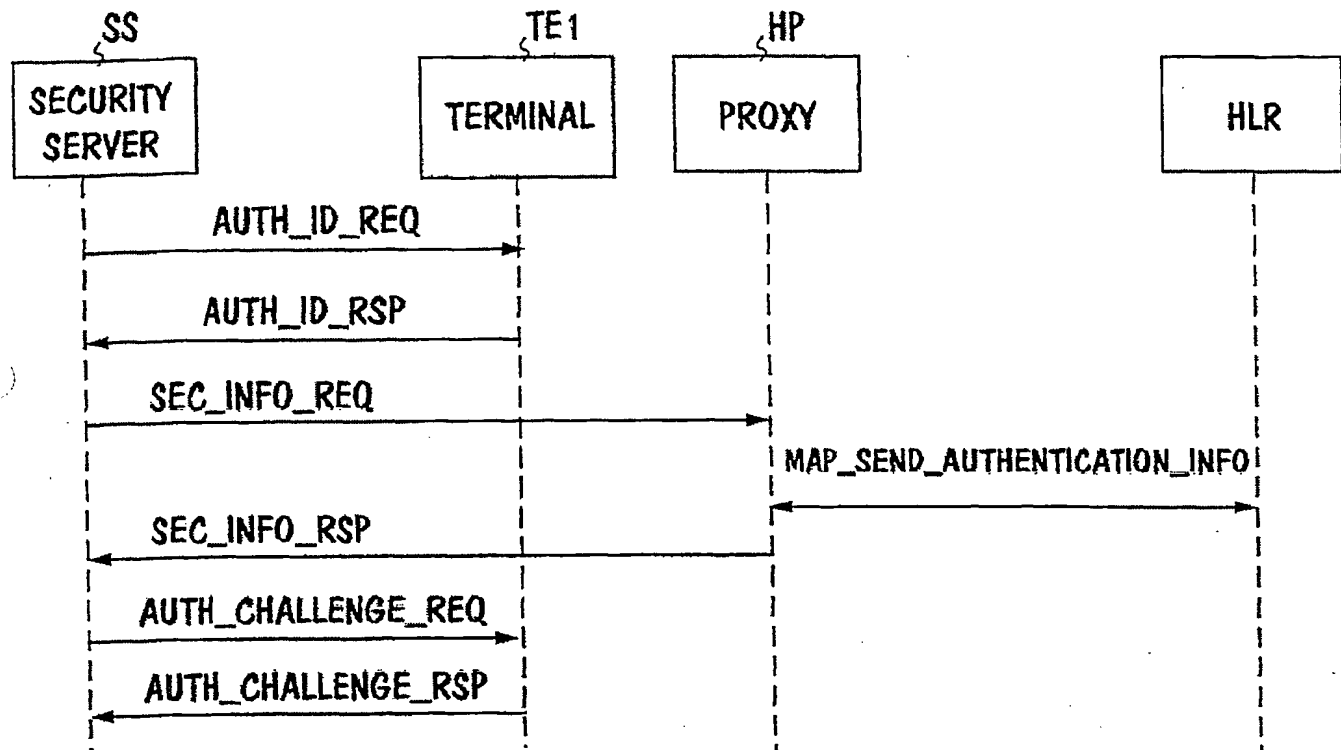15   entity to implement the method according to any one of claims 1 to 18.
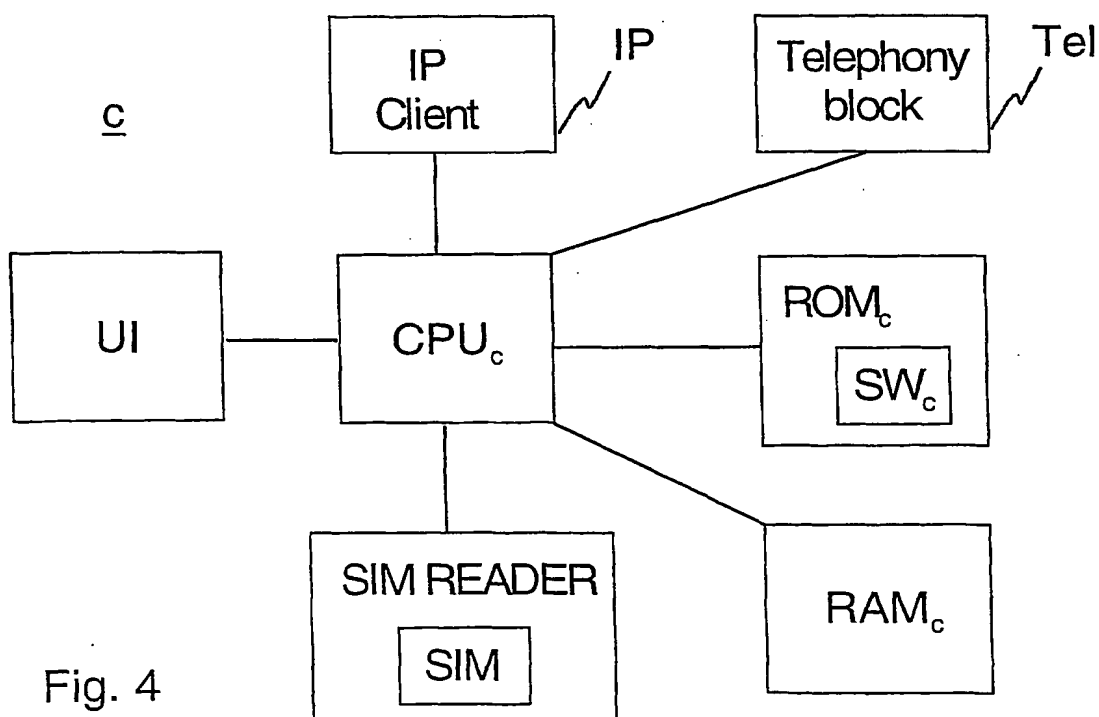
Fig. 1

Fig. 2

3/7

Fig. 3

Fig. 4
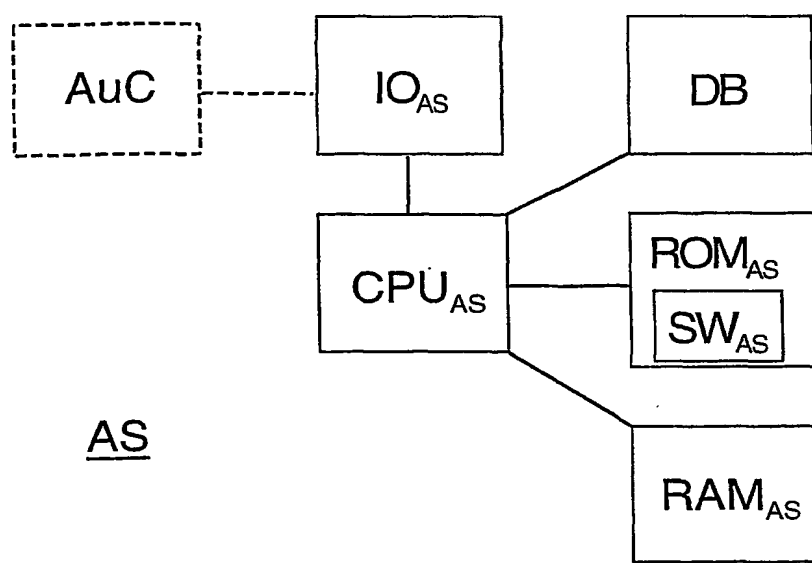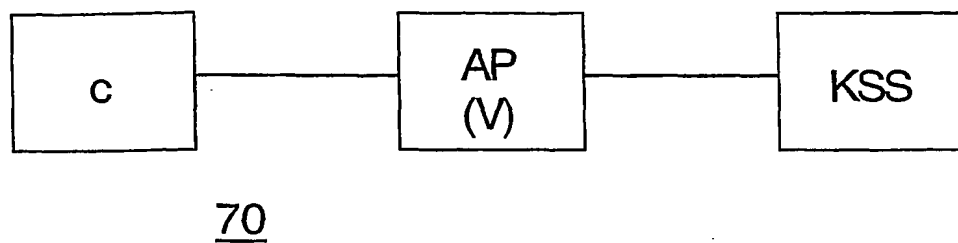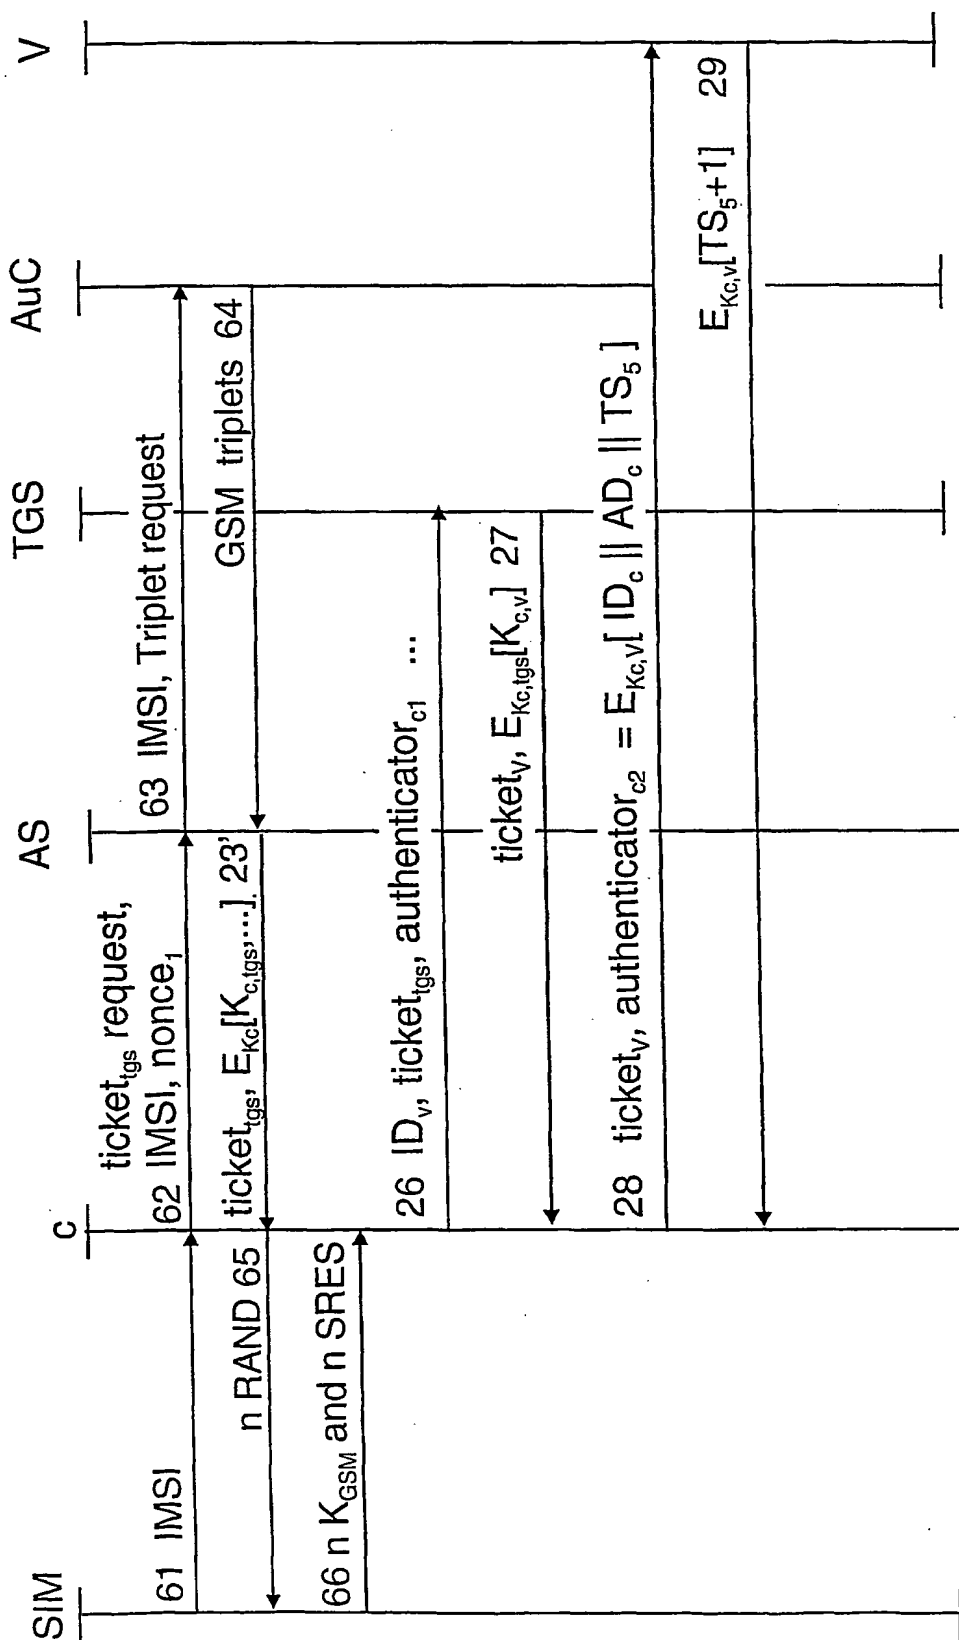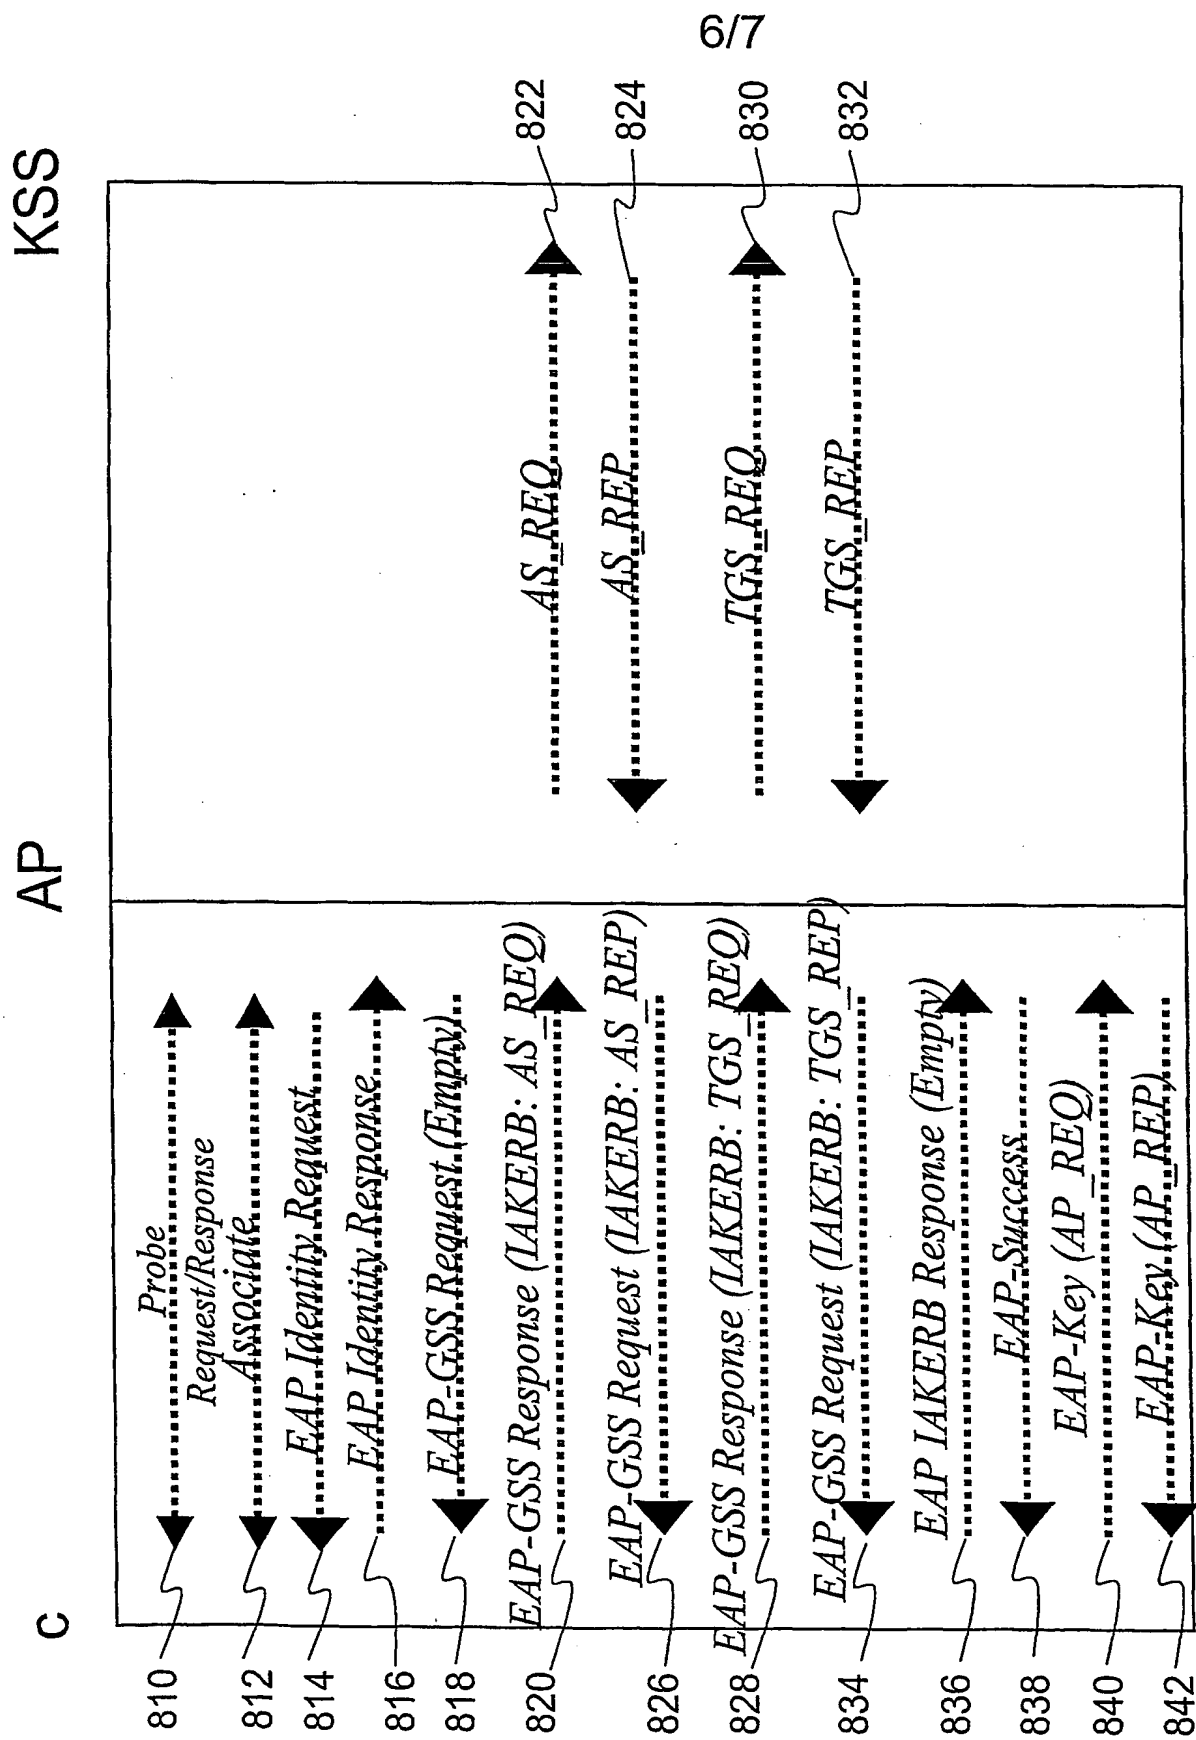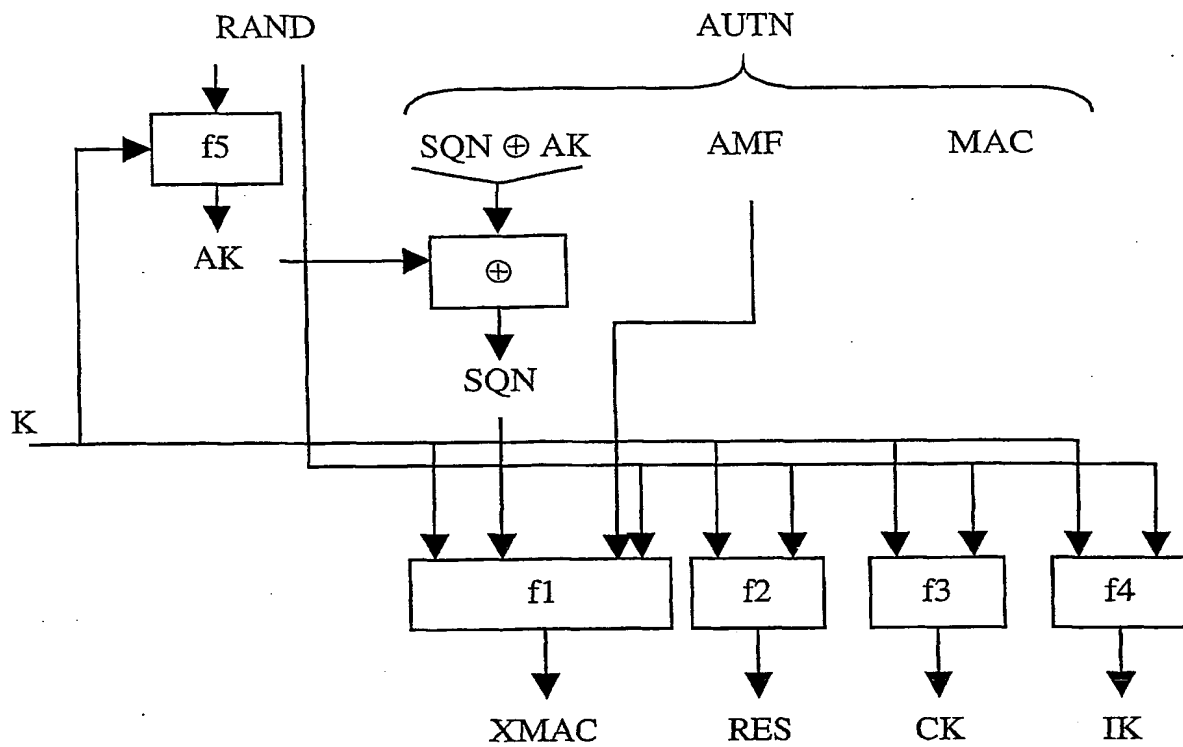
Fig. 5

Fig. 7

Fig. 6

KSS

AP

c

810 — Probe Request/Response

812 — Associate

814 — EAP Identity Request

816 — EAP Identity Response

818 — EAP-GSS Request (Empty)

820 — EAP-GSS Response (IAKERB: AS_REQ)

822 — AS_REQ

824 — AS_REP

826 — EAP-GSS Request (IAKERB: AS_REP)

828 — EAP-GSS Response (IAKERB: TGS_REQ)

830 — TGS_REQ

832 — TGS_REP

834 — EAP-GSS Request (IAKERB: TGS_REP)

836 — EAP IAKERB Response (Empty)

838 — EAP-Success

840 — EAP-Key (AP_REQ)

842 — EAP-Key (AP_REP)

Fig. 8

Fig. 9

Verify MAC = XMAC
Verify that SQN is in the correct range

Fig. 10

AUTS = SQN$_{MS}$ ⊕ AK || MAC-S
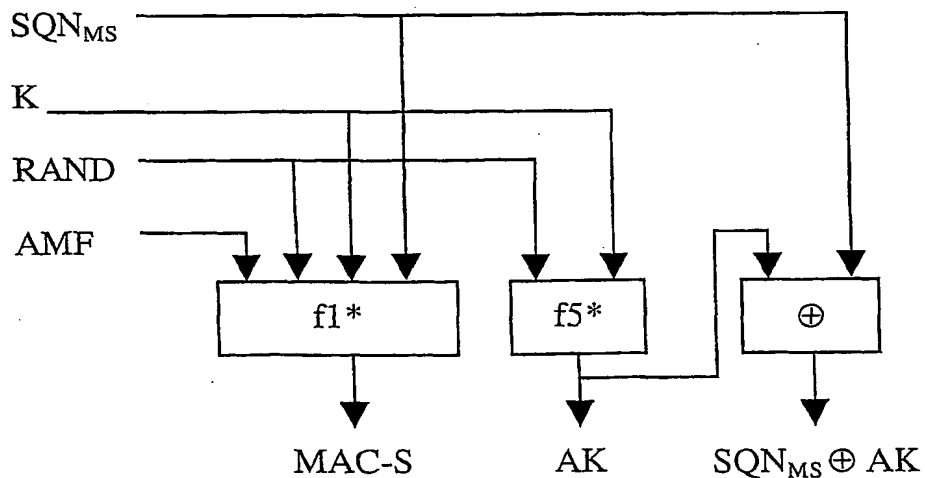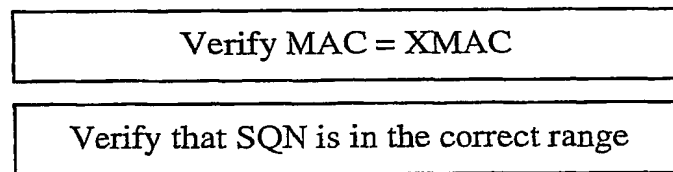
INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   H04L9/32   H04K1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7   H04L   H04K   H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 30285 A (ARCOT SYSTEMS INC) 25 May 2000 (2000-05-25) the whole document ---	1-24
A	WO 00 64088 A (CHAUM DAVID) 26 October 2000 (2000-10-26) the whole document ---	1-24
A	WO 99 31841 A (INTEL CORPORATION) 24 June 1999 (1999-06-24) the whole document ---	1-24
A	WO 00 02406 A (NOKIA NETWORKS OY) 13 January 2000 (2000-01-13) cited in the application the whole document -----	1-24

☐ Further documents are listed in the continuation of box C.   ☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 May 2002	12. 06. 2002

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer R Bengtsson

Form PCT/ISA/210 (second sheet) (July 1992)

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 0030285	A	25-05-2000	US	6170058 B1	02-01-2001
			US	6263446 B1	17-07-2001
			AU	2097399 A	12-07-1999
			CA	2314349 A1	01-07-1999
			EP	1048143 A1	02-11-2000
			JP	2001527325 T	25-12-2001
			NO	20003310 A	22-08-2000
			WO	9933222 A1	01-07-1999
			WO	0030285 A1	25-05-2000
			US	2001008012 A1	12-07-2001
			US	2001034837 A1	25-10-2001
			AU	1631200 A	05-06-2000
			BR	9915474 A	31-07-2001
			EP	1131911 A1	12-09-2001
			NO	20012463 A	18-05-2001
WO 0064088	A	26-10-2000	AU	4467200 A	02-11-2000
			EP	1163752 A1	19-12-2001
			WO	0064088 A1	26-10-2000
WO 9931841	A	24-06-1999	US	5974550 A	26-10-1999
			AU	2085699 A	05-07-1999
			EP	1042882 A1	11-10-2000
			JP	2002509388 T	26-03-2002
			TW	431105 B	21-04-2001
			WO	9931841 A1	24-06-1999
WO 0002406	A	13-01-2000	FI	981565 A	08-01-2000
			AU	4912199 A	24-01-2000
			DE	19983405 T0	31-05-2001
			WO	0002406 A2	13-01-2000
			GB	2355157 A	11-04-2001